

### Technical specifications for Slipsik 5

Dimensions (WxHxD)	103x59x180 mm
Weight	950 g
Mains voltage	115 V~ 60 Hz
Fuse (inside the case)	T1A
Input impedance	47 k $\Omega$ /68 pF
Gain at 1 kHz	41 dB (112 times)
Output impedance/Rec. load	300 $\Omega$ / $>$ 3 k $\Omega$
Power consumption	Less than 5 W

### Warning

Lethal voltages inside, do not open! No user serviceable parts inside. Refer servicing to qualified personnel. To reduce the risk of fire or electric shock, do not expose this appliance to rain or moisture. If the power cord needs replacing, please contact Lejonklou or your retailer. Never use an appliance with a damaged power cord, as there is risk of lethal shock.

The power cord is internally coloured as follows: Live=Black, Neutral=White, Ground=Green.

This appliance must be earthed.

CE Declaration of conformity:

This appliance follows the directives 73/23/EEC (LVD) and 89/336/EEC (EMC) by conforming to the following standards:

EN60065:2002 (Safety)

EN55013:2001 (Emissions)

EN55020:2002 (Immunity)



### Contact information

Firma Fredrik Lejonklou

Vänortsgatan 57

752 64 Uppsala

Sweden

Website: [www.lejonklou.com](http://www.lejonklou.com)

Email: [info@lejonklou.com](mailto:info@lejonklou.com)

Tel: +4670 558 0549

# LEJONKLOU

## *Slipsik phono preamplifier*


## *User Manual*

## Thank you for buying Lejonklou Slipsik 5!


Please read this manual carefully before connecting your Slipsik.

### Connections

Slipsik is a moving magnet phono preamplifier built in dual mono. This means that each side (left and right) handles one channel only. Start by connecting your turntable to the top (white) phono sockets as shown below.

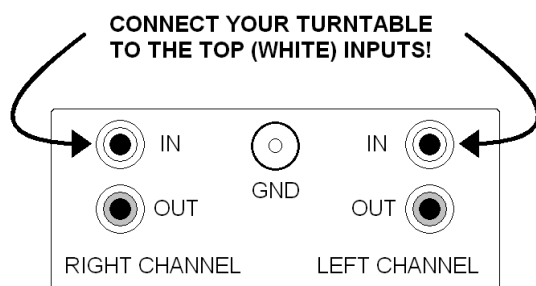

Now connect a good pair of interconnects from the outputs (red) to a pair of line level inputs on your amplifier, as shown below.

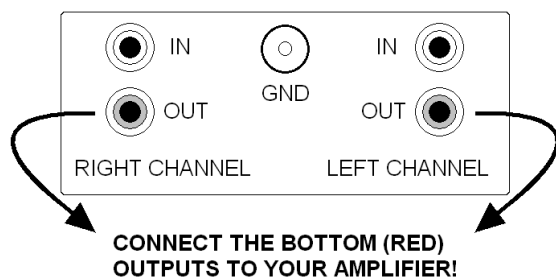

**Please note** that the colours white and red do **not** correspond to left and right! These connectors are chosen for best sound quality and their manufacturer has refused to produce them in black.


If your turntable has a ground lead, connect it to the large ground screw. Last of all, connect the power cord. On European models, make sure that the **live** phase of your power socket is on the same side as the **x** in the name **Volex** printed on the pin side of the power cord plug. This will result in a weaker electrical field around the power supply inside Slipsik, which improves the sound.

Slipsik has a very low power consumption and is designed to be operating continually. We strongly recommend, however, that you disconnect your Slipsik from the mains during thunderstorms and when left unused for longer periods of time.

### Extra ground lead

The optimal situation for your system is that all components are grounded through their power cords, to a single common point. Slipsik uses a floating ground design, which in such situations results in the best possible sound. In some systems, however, when Slipsik is properly grounded and the amplifier is not, a hum problem can result. The solution is to connect the supplied ground lead, between the case and the ground screw, as shown in the illustration below.

**If you don't have a hum problem, leave the extra ground lead disconnected from the ground screw.**



### We hope you will enjoy your Slipsik 5!

If you encounter any problems with it, please contact your retailer or Lejonklou directly. Email and telephone information can be found on the last page of this manual.